

## EHL-3TS



Chain type



Pendant switch available





Chain extension available



Air motor trolley (On request)



Over load protector (On request)

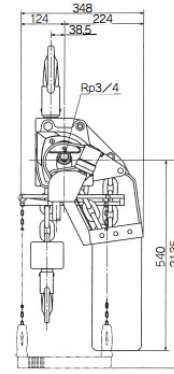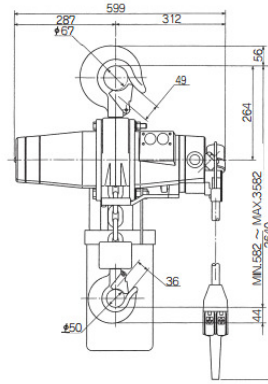

## EHL-6TW



Chain type



Pendant switch available





Chain extension available



Air motor trolley (On request)



Over load protector (On request)

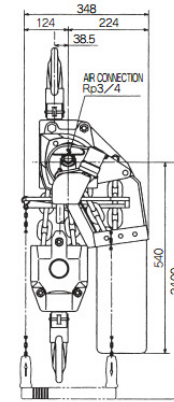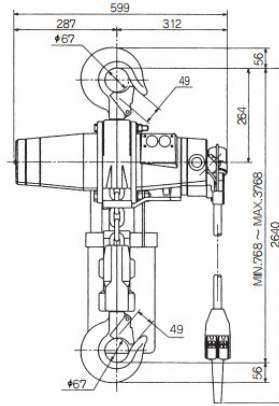

Ex II 2 G / D IIB T 4 (X)

## Specification

### JAPAN AIR CHAIN BLOCK

Model	Rated load t	Stroke m	Air pressure MPa(kgf/cm <sup>2</sup> )	Lifting speed m/min	Air consumption m <sup>3</sup> /min (normal)	Chain size x fall	Air inlet	Mass kg
AT-60K AT-60K-5	60kg	3	0.4{4}	16.5	0.52	4.0 x 1	Rc 3/8	12.3 (13.0)
			0.5{5}	20.0	0.67			
			0.6{6}	23.5	0.85			
ATC-60K ATC-60K-5	60kg	2	0.4{4}	14.0	0.45	4.0 x 1	Rc 3/8	14.3
			0.5{5}	17.0	0.58			
			0.6{6}	20.0	0.68			
AT-125K AT-125K-5	125kg	3	0.4{4}	10.0	0.55	4.0 x 1	Rc 3/8	12.5 (13.2)
			0.5{5}	12.0	0.71			
			0.6{6}	14.5	0.90			
ATC-125K ATC-125K-5	125kg	2	0.4{4}	6.5	0.42	4.0 x 1	Rc 3/8	14.5
			0.5{5}	10.5	0.55			
			0.6{6}	12.0	0.65			
EHL-025TS	1/4	3	0.4{4}	12.0	0.9	6.3 x 1	Rp 1/2	18.7
			0.5{5}	16.0	1.3			
			0.6{6}	18.0	1.6			
EHL-05TS	1/2	3	0.4{4}	7.5	0.95	6.3 x 1	Rp 1/2	18.7
			0.5{5}	9.0	1.3			
			0.6{6}	10.5	1.65			
EHL-098TW	980kg	3	0.4{4}	3.7	0.95	6.3 x 2	Rp 1/2	24.2
			0.5{5}	4.5	1.3			
			0.6{6}	5.2	1.65			
EHL-1TW	1	3	0.4{4}	3.7	0.95	6.3 x 2	Rp 1/2	24.2
			0.5{5}	4.5	1.3			
			0.6{6}	5.2	1.65			
EHL-1TS	1	3	0.4{4}	4.0	1.0	7.1 x 1	Rp 1/2	34.0
			0.5{5}	5.2	1.4			
			0.6{6}	6.0	1.8			
EHL-2TW	2	3	0.4{4}	2.0	1.0	7.2 x 2	Rp 1/2	42.0
			0.5{5}	2.6	1.4			
			0.6{6}	3.0	1.8			
EHL-3TS	3	3	0.4{4}	2.0	1.75	12.5 x 1	Rp 3/4	75.0
			0.5{5}	2.6	2.47			
			0.6{6}	3.0	3.14			
EHL-6TW	6	3	0.4{4}	1.0	1.75	12.5 x 2	Rp 3/4	96.0
			0.5{5}	1.3	2.47			
			0.6{6}	1.5	3.14			